


SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
315/80R22.5	160/157k	22PR(LRM)	4,540	4,125	K - 120 Km/H	130	1090	317	19	266	9

Recommended

Allowed

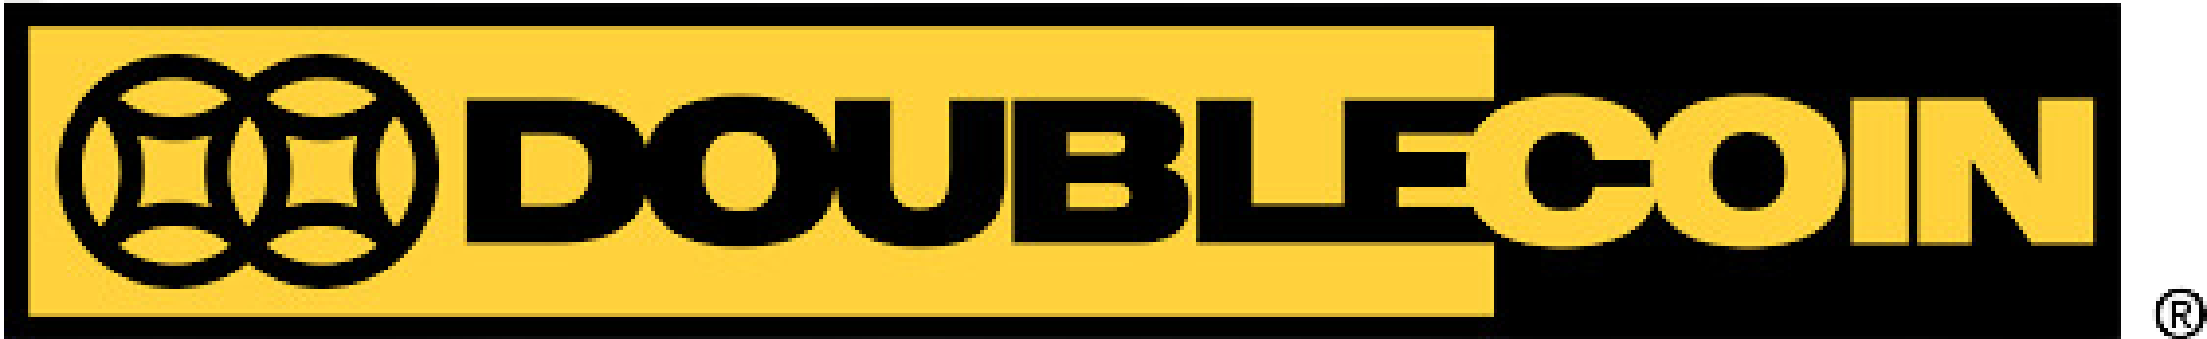

## RR716

### ALLPOSITION TIRE

- Ultra-Premium: Built for refuse/sanitation use.
- Dual Compound: Heat-dissipating & scrub-resistant.
- Durable: Reinforced sidewalls for protection & retreadability.








SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
315/80R22.5	156/152L	18PR(LRJ)	4000	3550	L - 120 Km/H	120	1085	315	15	238	9.00

- Recommended
- Allowed

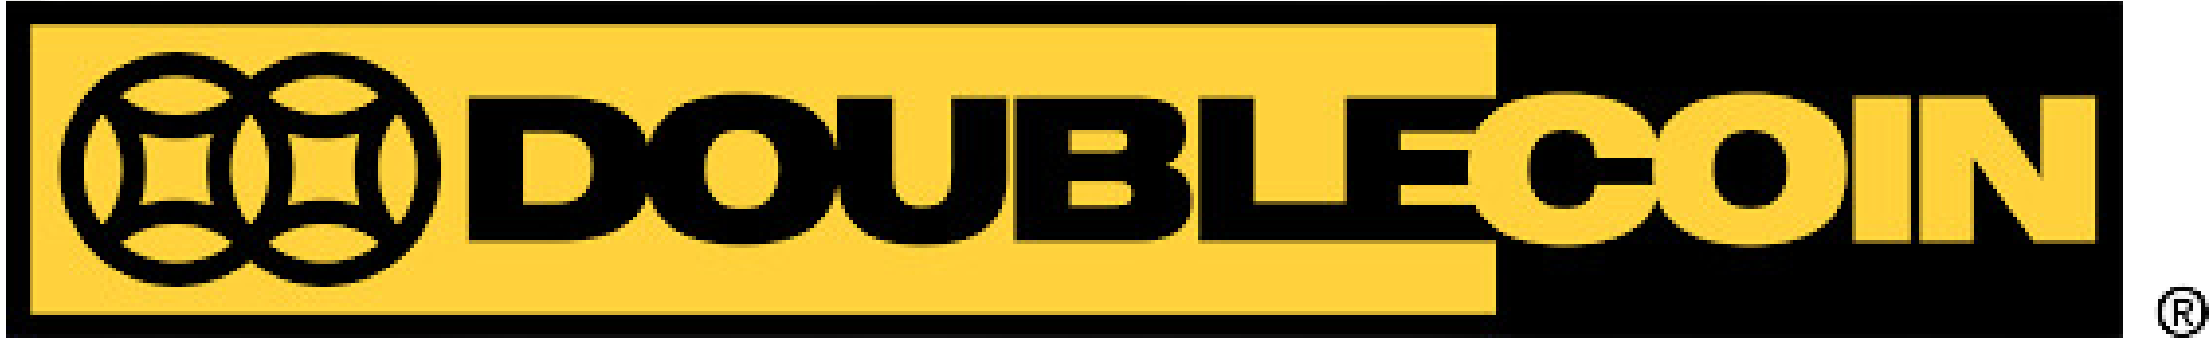

# RR99

## ALL POSITION

- Versatile: All-position tread for on/off-highway use.
- Durable: Cut/chip-resistant for tough conditions.
- High Traction: Zigzag grooves for mud & soft soil.






SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
9.5R17.5	143/141J	18PR	2725	2575	J - 100 Km/H	125 psi	843	239	16	184	6.75

Recommended

Allowed

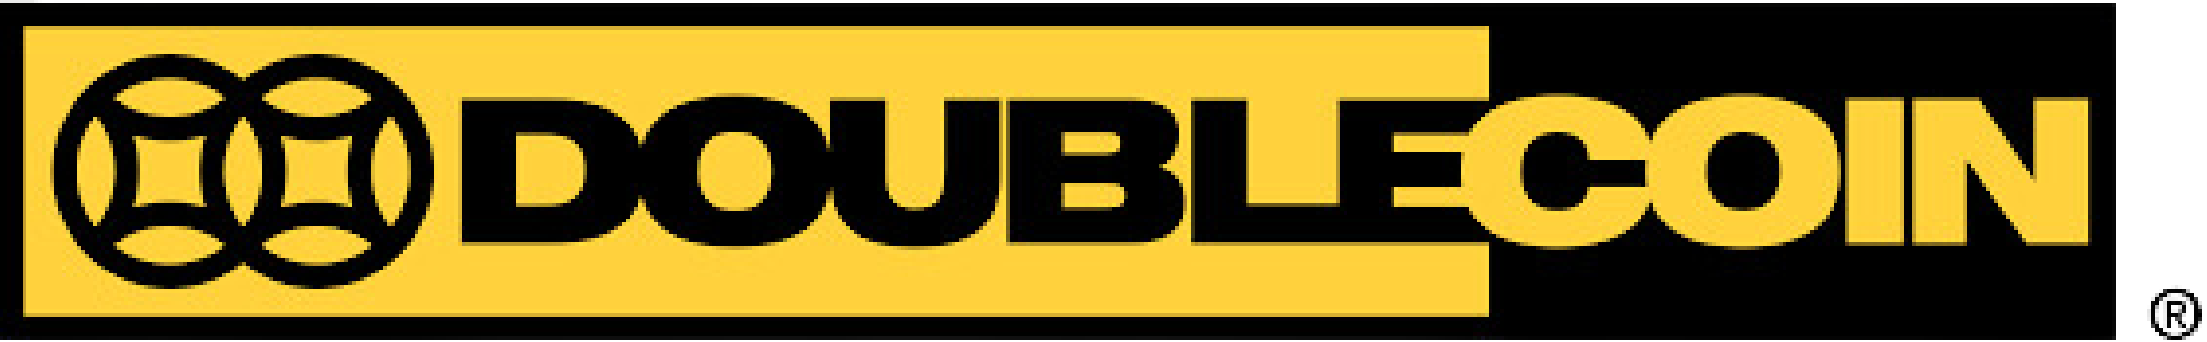

# RR505

## ALL POSITION

- Enhanced Grip: Special compound and deep grooves for better traction.
- Superior Drainage: Three continuous grooves for excellent water handling.
- Cooler: Open block edges reduce heat buildup.







Together, we'll go a longer way

SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
7.00R16LT	118/114L	14PR*(LRG)	1320	1180	L - 120Km/H	112 psi	772	200	12.5	168	5.50F
7.50R16LT	112/118L	14PR*(LRG)	2725	2575	L - 120Km/H	112 psi	812	212	15	170	6.00G

- Recommended
- Allowed



RR798

ALL POSITION

- Stronger Load Capacity: Reinforced bead toe and carcass.
- Better Traction: Zigzag grooves for all-road performance.

