



Together, we'll go a longer way


SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
235/75R17.5	143/141J	16PR(LRH)	2725	2575	J - 100 Km/H	125 psi	807	232	15.5	186	6.75
265/70R19.5	143/141K	16PR(LRH)	2725	2575	K - 110Km/H	125 psi	878	252	17.5	214	7.50



Recommended



Allowed

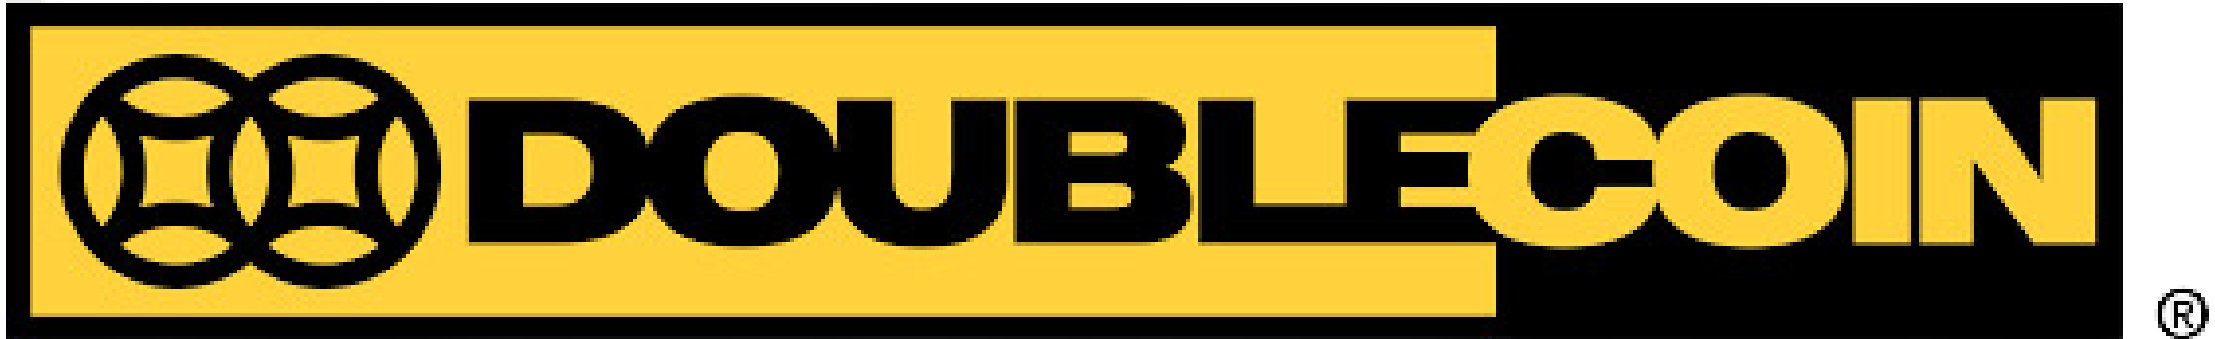

RLB490

TRAILER AXLE

- High Traction: Innovative tread resists irregular wear.
- Durable: Strong casing for regional and urban use.
- Long-Lasting: Deep tread for extended life.

